



APPROVAL

Class EI 120

Non toxic.

It expands up to 5 times.

In compliance with standard
EN 1365-2 • 1363-1

FSCF

Fire stop hoods for downlighters.

Fireproof dome shaped hood for downlighters in suspended ceilings. Maintains fire conditions of fire resistance of ceilings and suspended ceilings. Prevents fire propagation and slightly reduces the temperature in the void between the ceiling and the suspended ceiling.


- ▶ **Made from non-toxic mineral fibres.**
- ▶ **Resistant to fire and expandable compounds.**
- ▶ **Prevents lamp overheating.**
- ▶ **Flexible, light and self-supporting.**
- ▶ **Easy to install and to remove.**

INSTALLATION

No special care is required.

The protection must be placed on the spotlight, adhering to the panel.

For other dimensions please contact Raytech.

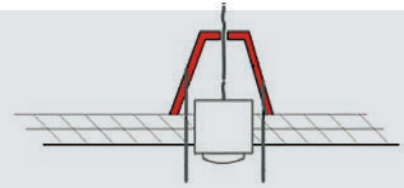

PRODUCT / Item	Dimension (mm)	Type
FSCF 250 FSCF-250	250 x 280	Cone-shaped
FSCF 350 FSCF-350	350 x 230	Dome-shaped



APPROVAL

Class EI 120

Non toxic.

In compliance with standard
EN 1364-1

FSSE


Intumescent fire stop barrier for electrical boxes.

Intumescent barrier for the fire protection of electrical system components built into walls.

- ▶ **Inserted in electrical boxes.**
- ▶ **Protection with high expansion properties.**
- ▶ **Guarantees wall conditions in the event of a fire.**

INSTALLATION

The protections are inserted inside the box before the insertion of modules. Protect corrugated pipes crossing walls with FST-E-25/32

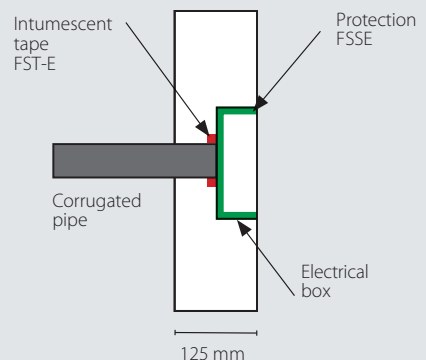

PRODUCT / Item	For electric boxes
FSSE 01 FSSE01	Up to three modules (type 503)
FSSE 02 FSSE02	Up to six modules (type 506)