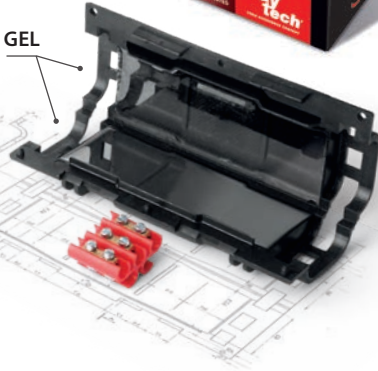



SUPER CLIK

Range of fast gel pre-filled straight or branch type joints for 0.6/1 kV multi core cables of up to 5 conductors.

The combination of the primary insulation in a cross-linked polymer gel and the highly robust insulating plastic case makes this a Class 2 joint defined by CEI 64-8. The joint has been tested in accordance with the main international specifications, with repeated flexing and torsion tests and immersion in water, it has been declared as conforming to the mechanical, electrical and sealing specifications required for plastic cable accessories. The joint and its components have an unlimited shelf life, they are chemically inert and therefore completely safe; the connections are re-entrable even after long working periods. Made of self-extinguishing components the joint is flame retardant. For cables at 90°C working temperature.



Electrical performance:
 • CEI EN 50393 as applicable
 • Class 2 in accordance with CEI 64-8.

🔹 Gel: UL 94-HB c  us

🔹 Casing mix: UL 94-V2

🔹 Working temperature: 90°

🔹 Installation temperature: -40°C / +50°C

🔹 Fully submersible

🔹 Can be used underground

🔹 Halogen-free Gel

🔹 UV resistant

🔹 No flame propagation:
 CEI 20-35 • IEC 60332-1 • HD405-1
 (as applicable)

IPX8
 OFFICIALLY
 TESTED | IMQ



ADVANTAGES


- ▶ Complete with insulated terminal blocks.
- ▶ For straight and branch connections.
- ▶ For all types of application, including submersible.
- ▶ Re-accessible.
- ▶ Flame retardant.
- ▶ Pre-filled with a gel that is not-classified as hazardous under the CLP Directive and with no shelf life.



SUPER CLIK


JOINTS

SUPER CLIK MINI

PRODUCT Item	Cable formation and conductor cross sections (n° x mm ²)			max cables Ø (mm)	 (mm)
	Straight Connections In line	Branch connections T B			
SUPER CLIK MINI L SUPERCLIKMINI-L	3 x 0,5 - 1,5	-	-	10	71 x 38 x 23
SUPER CLIK MINI Y SUPERCLIKMINI-Y	-	1 x 2,5 - 6	1 x 2,5	10	71 x 38 x 23

T : Through cable - B : Branch cable

SUPER CLIK

PRODUCT Item	Cable formation and conductor cross sections (n° x mm ²)			max cables Ø (mm)	 (mm)
	Straight Connections In line	Branch connections T B			
SUPER CLIK 0 SUPERCLIK0	3 x 1,5 - 6	3 x 1,5 - 4	3 x 1,5 - 2,5	14	95 x 43 x 28

T : Through cable - B : Branch cable

PRODUCT	In line	T	B	max cables Ø (mm)	(mm)
SUPER CLIK 1 SUPERCLIK1	2 x 1,5 - 6	2 x 4	2 x 2,5	20,5	150 x 56 x 30
	3 x 1,5 - 6	3 x 4	3 x 2,5		
	4 x 1,5 - 6	4 x 4	4 x 2,5		
	5 x 1,5 - 6	5 x 4	5 x 2,5		

T : Through cable - B : Branch cable

PRODUCT	In line	T	B	max cables Ø (mm)	(mm)
SUPER CLIK 2 SUPERCLIK2	2 x 4 - 16	2 x 10	2 x 6	30	220 x 85 x 46
	3 x 4 - 16	3 x 10	3 x 6		
	4 x 4 - 16	4 x 10	4 x 6		
	5 x 4 - 16	5 x 10	5 x 6		

T : Through cable - B : Branch cable

PRODUCT	In line	T	B	max cables Ø (mm)	(mm)
SUPER CLIK 3 SUPERCLIK3	-	2 x 4 - 25	2 x 1,5 - 16	30	220 x 85 x 46
	-	3 x 4 - 25	3 x 1,5 - 16		
	-	4 x 4 - 25	4 x 1,5 - 16		

T : Through cable - B : Branch cable

