



Gel: UL 94-HB

**Dielectric strength:**

>20 kV/mm

**Operating temperature:**

-60°C / +200°C


**Installation temperature:**

-40°C / +110°C

**Degree of protection:**

IP68 (in proper casings)

Wonder Gel Fluid protects against dust and seals the connections from the effects of continuous immersion in water when it is poured into casings protected from the ingress of solid bodies, thus helping to create a **IP68** system.

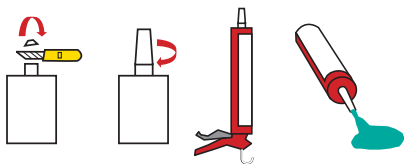

# WONDER FLUID

Single component insulation fluid gel cartridge.

**ADVANTAGES**

- ▶ The gel is not-classified as hazardous under the CLP Directive.
- ▶ Ready-to-use fluid gel.
- ▶ Suitable for box filling.
- ▶ Does not solidify when opened.
- ▶ No waste.
- ▶ No shelf life.



PRODUCT / Item	Colour	Package type	Total quantity
WONDER FLUID 280 WONDER-F280	●	Cartridge with dosing nozzle	280 ml